


■ Use... "Use" part is explaining about sealing object and installation precautions.

■ Rotation speed... This part is explaining about seal's applicable rotation speed based on our usage record.

※ Please contact our Seals Department for higher rotation use.

Wk type

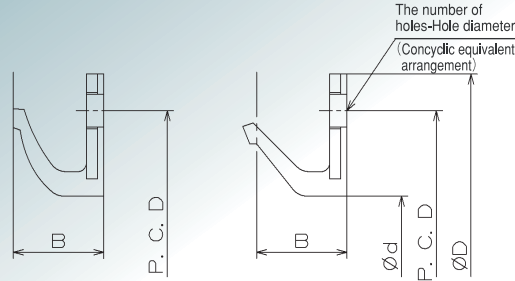

■ Use

- Dust, scale and splash water seal.
 - Dust seal for rolling machine roll neck part.
 - WK type Seal seals vertically to the shaft.
- ※ Please carefully measure bolt pitch and size before choosing WK type.
- ※ For water removal, WK type sometimes used with partly cut off lip.

■ Rotation speed

Less than 16m/s

Address term	Mein dimension (mm)					
	内径 (φd)	Outer diameter (φD)	width (B)	P.C.D	The number of holes	Hole diameter
WK - 280 × 340 × 25	280	340	25	320	8	9.5
WK - 290 × 350 × 35	290	350	35	330	6	9.5
WK - 300 × 360 × 30	300	360	30	340	8	9.5
WK - 310 × 370 × 30	310	370	30	350	6	9.5
WK - 320 × 380 × 30	320	380	30	355	6	9
WK - 340 × 410 × 26	340	410	26	395	8	9.5
WK - 340 × 410 × 26 S	340	410	26	390	8	9.5
WK - 435 × 489 × 25.4	435	489	25.4	470	8	10

Address term	Mein dimension (mm)					
	内径 (φd)	Outer diameter (φD)	width (B)	P.C.D	The number of holes	Hole diameter
WK - 458 × 540 × 26	458	540	26	510	12	11.5
WK - 480 × 550 × 28	480	550	28	525	6	9.5
WK - 572 × 660 × 43	572	660	43	622.3	6	18
WK - 880 × 1050 × 53	880	1050	53	990	12	33
WK - 1000 × 1108 × 38	1000	1108	38	1065	12	14
WK - 1120 × 1245 × 28	1120	1245	28	1194	16	12
WK - 1241 × 1374 × 29	1241	1374	29	1315	16	12
WK - 1319 × 1453 × 29	1319	1453	29	1393	18	12